


TECHNICAL DETAILS // 40 MINI LOUVRE



BLADE SPECIFICATIONS

// Weight per square metre - blades at 40mm centres _____ 9.12 kg/sqm // Weight per lineal metre _____ 0.365 kgm
 // Actual blade width _____ 42 mm

SPANS AT A GLANCE

Important: Refer to section 12 for engineering details. Factors such as climate, terrain, shielding, location, type of structure all contribute to determine spans.

WIND ZONE	INSIDE	LOW	MED	HIGH	VERY HIGH
Factored wind speed at building	Self wt	32m/s-115km/h	37m/s-133km/h	44m/s-158km/h	50m/s-179km/h
Ultimate limit state loads (kPa)		+1.1 & -1.38	+1.48 & -1.85	+2.09 & -2.61	+2.70 & -3.38
40mm Mini Louvre Max. Horiz.	1500	1350	1200	1110	1000


INSTALLATION OPTIONS

// END FIXED OPTION ONLY




// Pre punched fixing channel ideal for louvre doors, wardrobes etc.

// OPTION 1

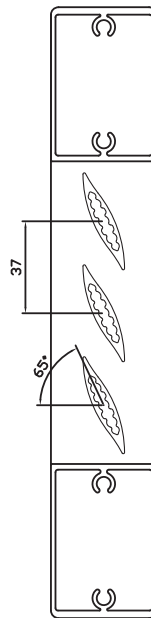

// Pre punched fixing channel
 Louvres at 65° pitch x 37mm centres

// OPTION 2

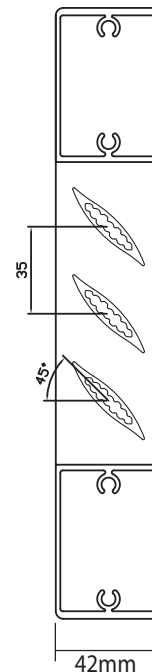

// Channel drilled to suit
 - centres may vary